

OTDR Report (1310 nm (9 μm))

General Information

File name:	94_1310.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	3:30 PM	Fiber ID:	94
Cable ID:	FAR0 to FAR3 1A (A-B)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	FAR0	FAR3
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	2.4454 km	Average loss:	0.563 dB/km	Injection level:	25.3 dB
Span loss:	1.378 dB	Average splice loss:	---		
Span ORL:	36.60 dB	Maximum splice loss:	---		

Graph

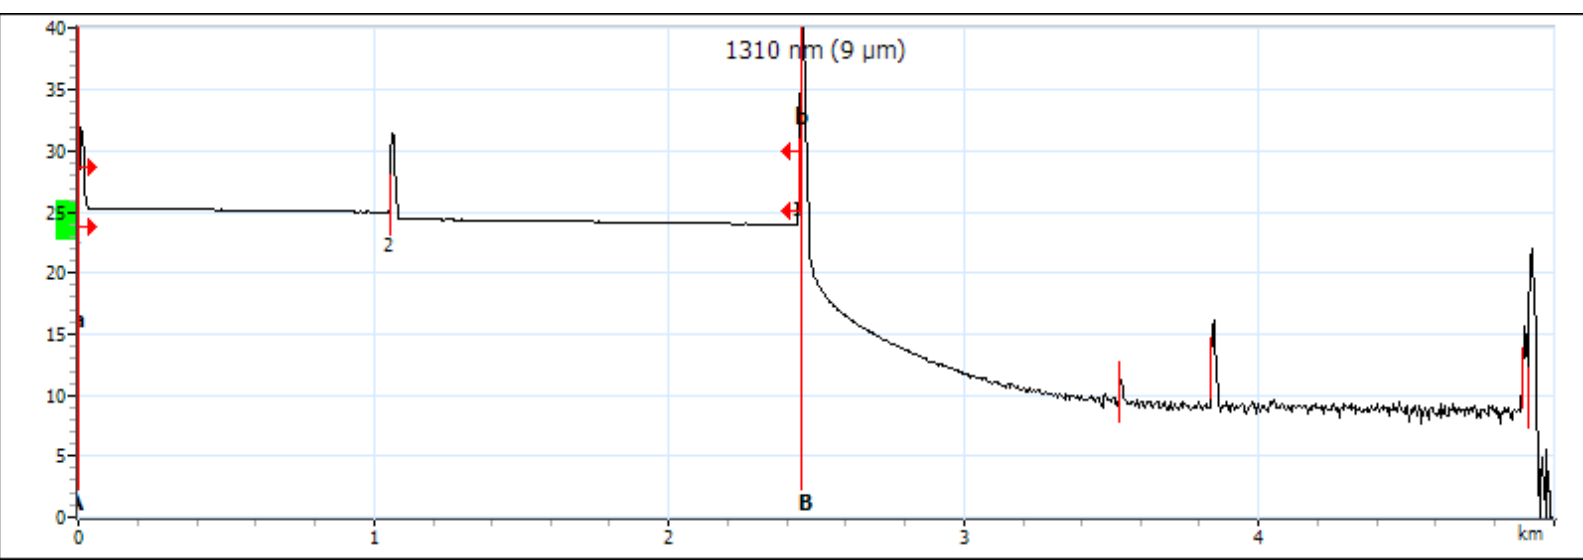

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation:	0.729 dB/km	A-B average loss:	-6.802 dB/km
a	0.0000	25.365	A-B LSA loss:	1.788 dB	4-point Event Loss:	-17.527 dB
A	0.0000	25.365	A-B ORL:	<31.83 dB	Maximum reflectance:	> -26.1 dB
B	2.4505	42.034				
b	2.4505	42.034				

OTDR Report (1310 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-46.0		0.000
Section		1.0558	0.374		0.354	0.374
Reflective	2	1.0558	0.538	-45.9		0.912
Section		1.3896	0.466		0.335	1.378
Reflective	3	2.4454	---	> -22.7		1.378
Section		1.0832	---		---	---
Reflective		3.5286	---	-57.7		---
Section		0.3096	---		---	---
Echo		3.8382	---	-45.0		---
Section		1.0551	---		---	---
Merged Events		4.8933	---	-32.4		---

Macroband

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1310 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1310 nm (9 μm)
Range (km)	5.0000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macroband Wavelengths	Macroband Delta Loss (dB)
IOR	1.467700		
Backscatter (dB)	-79.45		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		

OTDR Report (1550 nm (9 μm))

General Information

File name:	94_1550.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	3:30 PM	Fiber ID:	94
Cable ID:	FAR0 to FAR3 1A (A-B)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	FAR0	FAR3
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	2.4450 km	Average loss:	0.398 dB/km	Injection level:	24.2 dB
Span loss:	0.972 dB	Average splice loss:	---		
Span ORL:	38.96 dB	Maximum splice loss:	---		

Graph

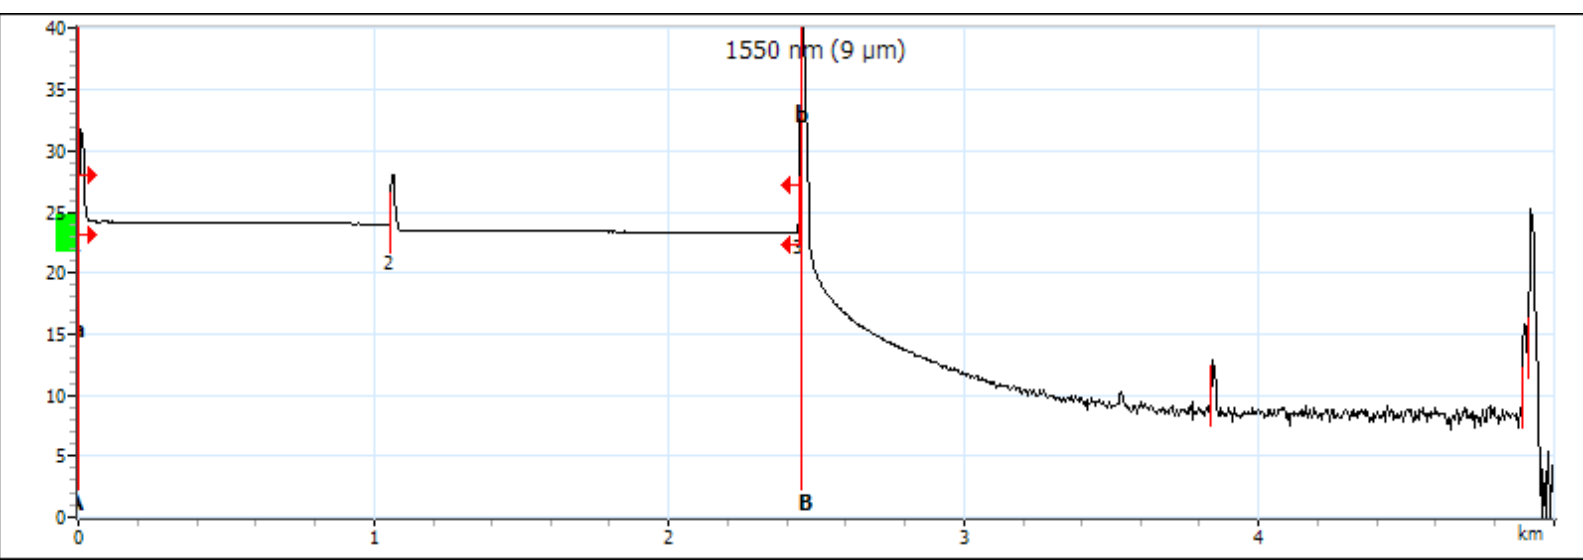

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation: 0.555 dB/km A-B LSA loss: 1.359 dB A-B ORL: <31.79 dB	A-B average loss: -7.148 dB/km 4-point Event Loss: -18.007 dB Maximum reflectance: > -26.0 dB
a	0.0000	24.632		
A	0.0000	24.632		
B	2.4505	42.148		
b	2.4505	42.148		

OTDR Report (1550 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-46.4		0.000
Section		1.0560	0.210		0.199	0.210
Reflective	2	1.0560	0.462	-53.6		0.672
Section		1.3890	0.300		0.216	0.972
Reflective	3	2.4450	---	> -23.5		0.972
Section		1.3941	---		---	---
Reflective		3.8391	---	-53.1		---
Section		1.0540	---		---	---
Merged Events		4.8931	---	-27.6		---

Macrobend

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1550 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1550 nm (9 μm)
Range (km)	5.0000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macrobend Wavelengths	Macrobend Delta Loss (dB)
IOR	1.468325		
Backscatter (dB)	-81.87		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		